

Trash Pump

TP08



SPECIFICATIONS

ITEM	U.S.A.	METRIC
Capacity	800 gpm	3,028 lpm
Weight	59 lbs	26.7 kg
Height (over handle)	16.5 in.	42 cm
Length	19 in.	48.3 cm
Width	15 in.	38.1 cm
Pressure	2,000 psi	140 bar
Flow Range	7-9 gpm	26-34 lpm
Maximum Flow	9 gpm	34 lpm
Porting	#10 SAE (Press.) #12 SAE (Ret)	
Connect Size and Type	1/2 in. Male Pipe (Press.) 3/4 in. Male Pipe (Ret)	
Discharge Diameter	4 in. Camlock	
Inlet Diameter	4 in.	100 mm

The Stanley **TP08** Trash Pump is a light-weight, heavy duty pump capable of pumping high volumes of water, sand slurries, gravel, sludge and solids up to 3 in./75 mm in diameter. The **TP08** is submersible, self priming and can run dry without damage to the motor, bearings or impeller.

The **TP08** has been designed to get the most from an HTMA Type II hydraulic circuit. Using only 9 gpm/34 lpm of hydraulic flow, the **TP08** will pump over 800 gpm/3,028 lpm at a 10 ft/2.54 m head. The free-flow impeller and 4 in./100 mm inlet and outlet combine to make the **TP08** one of the most efficient pumps in the business.

Weighing only 59 lbs/27 kg and with its convenient handle, the **TP08** can easily be

handled by one operator. The **TP08** and the Stanley HPI Compact Power Unit make a powerful, portable team for high volume de-watering and trash pump applications.

The heavy-duty construction of the **TP08** features a fabricated, all steel volute and abrasion resistant cast iron impeller. The volute uses replaceable UHMW polyethylene wear plates to reduce wear and extend pump life. The heavy-duty Stanley HYREVZ™ hydraulic motor is self-lubricating.

Routine maintenance for the **TP08** is easy. The top cover is attached to the volute with six wing nuts so cleaning and inspection can be accomplished in just a few minutes.

Steffen Inc
623 W 7th Street
Sioux City, IA 51103
Toll Free: 800-382-3599
Fax: 712-279-8070
Email: stanley-sales@steffeninc.com

STANLEY
Hydraulic Tools


ORDERING INFORMATION

ORDER NO.

DESCRIPTION

TP08013


4 in. Trash Pump, 800 gpm/3028 lpm

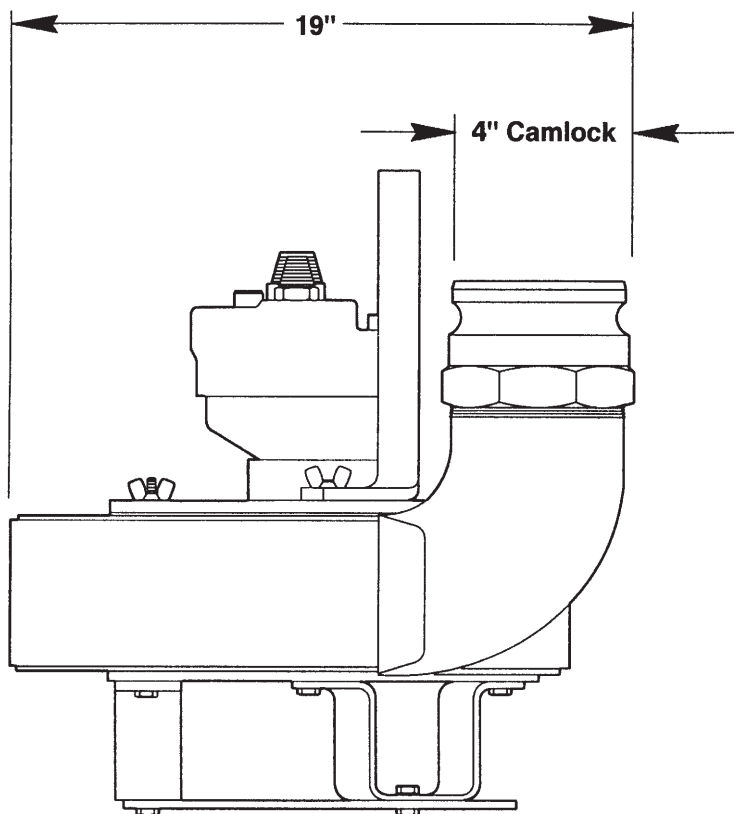

WARRANTY

Stanley Hydraulic Tools and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flow and pressure ratings are exceeded.

TP08 PERFORMANCE CHART

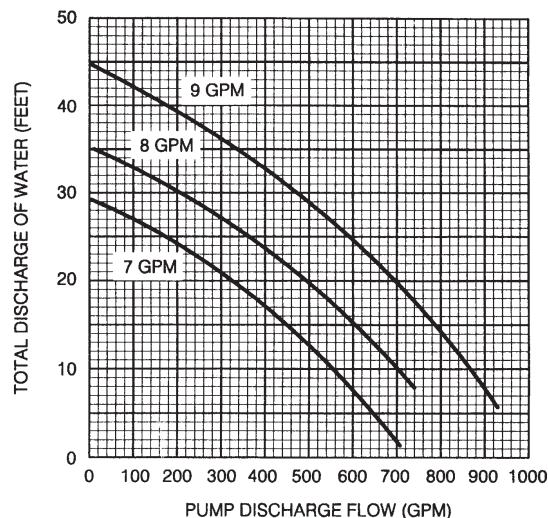

All Stanley Hydraulic Tools, Parts, Accessories and allied equipment are subject to design improvements, specification and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your application, please consult Stanley Hydraulic Tools.

Call the Stanley Hydraulic Tools dealer nearest you...

Steffen Inc
 623 W 7th Street
 Sioux City, IA 51103
 Toll Free: 800-382-3599
 Fax: 712-279-8070
 Email: stanley-sales@steffeninc.com

STANLEY